



TTI

Service Quality Innovation

European PowerBreather™


Protects lubricants and equipment from moisture and particulate intrusion.
Extends service cycles and equipment life resulting in lower lifetime operating costs.



European PowerBreather™

This breather unit is a marked improvement over the customary dust caps or OEM breathers on equipment. When contaminated air enters the top of the breather, it passes through layered filter media, preventing solid particles from entering the breather and causing undue wear to your equipment surfaces. Filtered air passes through a bed of PowerBreather™ silica gel, which removes harmful moisture from the air. The silica beads also work to attract moisture from inside the equipment reservoir during service or shut-down, keeping the equipment dry.

- ① **Center Tube**
The center tube is constructed from rugged nylon material providing rigidity to the element and allowing for even airflow through the silica gel.
- ② **Secondary Filter Media**
Second filter step prevents any possible migration of silica dust providing added system protection.
- ③ **Secondary Oil Mist Collector**
Polyurethane foam collects oil mist and distributes air evenly over filter media and moisture absorbing silica gel.
- ④ **Moisture Absorbent**
The PowerBreather™ silica gel provides industry leading moisture removal and holds up to 40% of its weight.
- ⑤ **ABS Outer Shell**
Clear outer shell provides a visual indicator of silica gel condition allowing for optimum change out intervals.
- ⑥ **Filter Media**
3-micron absolute particulate filtration is provided by a polyester filter media.
- ⑦ **Oil Mist Collector**
Polyurethane foam collects oil mist and distributes air evenly over filter media and moisture absorbing silica gel.
- ⑧ **Air intakes**
Air intakes are opened based on flow requirements and provide moisture protection for breather while being shipped/stored.
- ⑨ **Sure-fit Connection**
Use sure-fit connections instead of filler/breather cap. Adapters also available.

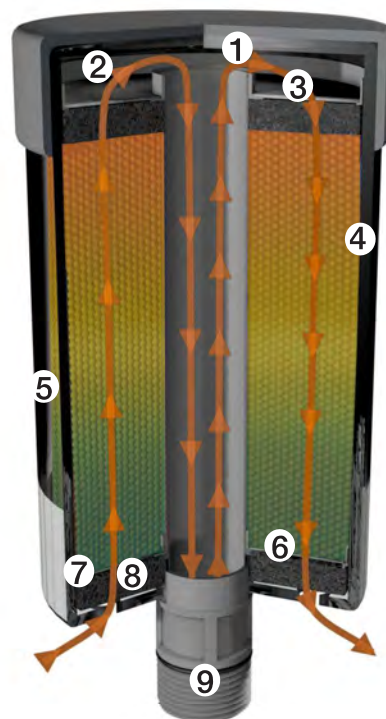

Dimensions

| Model | Connection | Height | Width |
|--------|------------------------------------|-------------------|------------------|
| TTE-BB | 3/8" Sure-Fit (NPT, BSPP, BSPT) | 4.14" (10.52 cm) | 2.54" (6.45 cm) |
| TTE-1 | 3/8" Sure-Fit (NPT, BSPP, BSPT) | 5.59" (14.2 cm) | 2.54" (6.45 cm) |
| TTE-2 | 1" Sure-Fit (NPT, BSPP, NPSM) | 6.11" (15.52 cm) | 4.10" (10.41 cm) |
| TTE-3 | 1" Sure-Fit (NPT, BSPP, NPSM) | 8.28" (21.03 cm) | 4.10" (10.41 cm) |
| TTE-4 | 1" Sure-Fit (NPT, BSPP, NPSM) | 10.38" (26.37 cm) | 4.10" (10.41 cm) |

Sizing Suggestions

| Model | Max Moisture Retention |
|-------|------------------------|
|-------|------------------------|

| | |
|--------|---------------------|
| TTE-BB | 28 ml / 1.0 fl oz |
| TTE-1 | 60 ml / 2.0 fl oz |
| TTE-2 | 142 ml / 4.8 fl oz |
| TTE-3 | 264 ml / 8.9 fl oz |
| TTE-4 | 424 ml / 14.3 fl oz |

| Model | Max Airflow at 1psid |
|-------|----------------------|
|-------|----------------------|

| | |
|--------|------------------|
| TTE-BB | 7 cfm / 198 lpm |
| TTE-1 | 7 cfm / 198 lpm |
| TTE-2 | 18 cfm / 510 lpm |
| TTE-3 | 18 cfm / 510 lpm |
| TTE-4 | 18 cfm / 510 lpm |

Materials

Body:

ABS, Nylon, Polypropylene, Buna

Moisture Absorbing Media:

Silica Gel

Filter Media:

Polyester, Polyurethane

Filter Efficiency:

3 Micron Absolute

Operating temperatures:

-20 F to 200 F

-29 C to 93 C

Performance

The TTI Breather offers significant performance improvements over other leading desiccant breathers.

Value add features:

Multiple head-to-head tests with leading competitors demonstrate that TTI PowerBreather™ Silica Gel averages nearly 20% more moisture holding capacity than other leading brands.

The increased body length of the TTI PowerBreather™ allows for 10% more volume of our silica gel when compared to leading competitors.



Service Quality Innovation

Here When You Need Us

Derek Kula

Vice President of Business Development; MLT 1

Office: +1.303.585.0132

Cell: +1.949.335.2438

Email: derek@toddtechinc.com



David Filloy

Director of Sales for Latin America

Office: +1.303.585.0132

Cell: +1.305.607.0133

WhatsApp: +506.8844.1688

Email: david.filloy@toddtechinc.com



Dustin Flynn

Account Manager, Eastern US; MLT 1

Office: +1.303.585.0132

Cell: +1.949.563.3003

Email: dustin@toddtechinc.com

